


## 珍寶窗式冷氣機

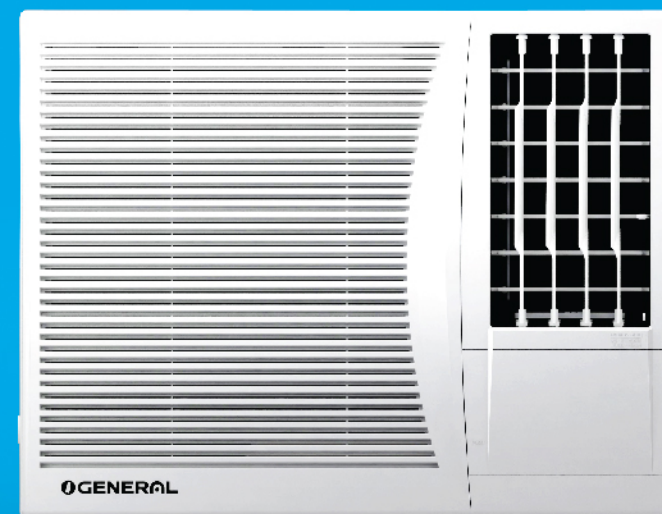

備有 $\frac{3}{4}$ 匹-2.5匹  
以供選擇

Powerful Represents Comfort

# 強大功率 代表安逸快感。

## 強大功率 Strong Power

通過革新的“強大功率”操作功能而實現了高舒適度。  
Pursuit of optimum comfort through innovative “Powerful” operation.

## 寧靜運轉 Quiet Operation

“寧靜運轉”操作功能令您安眠舒適。  
“Quiet” operation enables comfortable sleep.

## 寬闊氣流 Wide Airflow

“寬闊氣流”，令您感覺舒適滿意。  
“Wide airflow”. Gives you a comfortable and satisfactory environment.



## “兒茶素過濾網”

### Catechin Filter

(除了 Except for AFWA17FAT, AXWA23FAT)

兒茶素過濾網過濾花粉、塵埃及微粒，保持空氣清新。

The Catechin Filter filtrates pollen and dust particles to keep air fresh.




## 防滴設計

### Non-Drip Design

(除了 Except for AFWA17FAT, AXWA23FAT)

實現防滴設計無需排水管  
(但多濕地區長時間使用時，可安裝水盆，做好排水措施。)

Non-drip design No drain piping work is necessary  
(in humid location or operate for an extended period may require to install a Drain boat for better drainage).



## 藍色冷凝器翅片

### Blue Condenser Fins

(用於 For All models)

鋁片上加上藍色塗層，提高防銹功能。

The blue coating on the aluminum fins provides improved anti-rust performance



## 自動風葉

### Auto Louver

(用於 For All models)







淨冷式 **New**

Cooling

**AK717FNR**

7,000BTU/h

1級能源標籤



**AK917FNR**

8,800BTU/h

1級能源標籤



淨冷式 **New**

Cooling

**AKR717FNR**

7,000BTU/h

1級能源標籤



**AKR917FNR**

8,800BTU/h

1級能源標籤



無線遙控，  
備有預校24小時開關時間掣  
Wireless R.C. with  
24-Hour ON/OFF Timer



淨冷式 **New**

Cooling

**AMWB12FBT**

11,900BTU/h

1級能源標籤



淨冷式 **New**

Cooling

**AMWR12FCT**

11,900BTU/h

1級能源標籤



無線遙控，  
備有預校24小時開關時間掣  
Wireless R.C. with  
24-Hour ON/OFF Timer



淨冷式

Cooling

**AFWA17FAT**

16,400BTU/h

3級能源標籤



淨冷式

Cooling

**AFWA18FAT**

17,400BTU/h

1級能源標籤



淨冷式 **New**

Cooling

**AFWR18FAT**

17,400BTU/h

1級能源標籤



無線遙控，  
備有預校24小時開關時間掣  
Wireless R.C. with  
24-Hour ON/OFF Timer



淨冷式

Cooling

**AXWA23FAT**

22,000BTU/h

4級能源標籤



淨冷式 **New**

Cooling

**ALWA24FAT**

22,300BTU/h

1級能源標籤



## 規格 SPECIFICATIONS

### 淨冷式 Cooling Type

| 型號 Model No.                               |                | AK717FNR    | AKR717FNR   | AK917FNR    | AKR917FNR   | AMWB12FBT   | AMWR12FCT   | AFWA17FAT   | AFWA18FAT   | AFWR18FAT   | AXWA23FAT   | ALWA24FAT   |
|--------------------------------------------|----------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| 項目 Item                                    |                |             |             |             |             |             |             |             |             |             |             |             |
| 能力 Capacity                                | 千瓦             | 2.05        | 2.05        | 2.58        | 2.58        | 3.50        | 3.50        | 4.80        | 5.10        | 5.10        | 6.45        | 6.54        |
|                                            | 英卡/時           | 7,000       | 7,000       | 8,800       | 8,800       | 11,900      | 11,900      | 16,400      | 17,400      | 17,400      | 22,000      | 22,300      |
| 除濕 Moisture Removal                        | 品脫/時<br>(公升/時) | 1.7         | 1.7         | 2.11        | 2.11        | 2.7         | 2.7         | 4.5         | 3.6         | 3.6         | 7.2         | 5.28        |
|                                            | l/h            | 0.8         | 0.8         | 1.0         | 1.0         | 1.3         | 1.3         | 2.1         | 1.7         | 1.7         | 3.4         | 2.5         |
| 室內空氣循環 (高能力)<br>Room Air Circulation(High) | 立方尺/分          | 206         | 206         | 206         | 206         | 265         | 265         | 353         | 394         | 394         | 571         | 500         |
|                                            | 立方米/時          | 350         | 350         | 350         | 350         | 450         | 450         | 600         | 670         | 670         | 970         | 850         |
| 電壓/相-頻率 Power Source                       | 伏特/〇/赫茲        | 220/1/50    | 220/1/50    | 220/1/50    | 220/1/50    | 220/1/50    | 220/1/50    | 220/1/50    | 220/1/50    | 220/1/50    | 220/1/50    | 220/1/50    |
| 運轉電流 Running Current                       | 安培             | 3.5         | 3.5         | 5.7         | 5.7         | 7.3         | 7.3         | 8.5         | 8.3         | 8.3         | 12.1        | 10.1        |
| 電功率 Input Power                            | 千瓦             | 0.695       | 0.695       | 0.877       | 0.877       | 1.186       | 1.186       | 1.85        | 1.728       | 1.728       | 2.65        | 2.217       |
| 高能量效率比 EER                                 | 千瓦/千瓦          | 2.95        | 2.95        | 2.94        | 2.94        | 2.95        | 2.95        | 2.59        | 2.95        | 2.95        | 2.43        | 2.95        |
| 外形尺寸 高×寬×深 Dimensions H×W×D                | 毫米 mm          | 350×450×580 | 350×450×580 | 350×450×580 | 350×450×580 | 375×560×668 | 375×560×668 | 400×660×633 | 428×660×705 | 428×660×705 | 455×670×705 | 428×660×770 |
| 淨重 Net Weight                              | 公斤 (磅)         | 30(66)      | 30(66)      | 34(74)      | 34(74)      | 46(101)     | 46(101)     | 59(130)     | 56(123)     | 56(123)     | 67(148)     | 72(161)     |
| 強大功率 Strong power                          |                |             |             |             |             | ●           | ●           | ●           | ●           | ●           | ●           | ●           |
| 寧靜運轉 Quiet Operation                       |                | ●           | ●           | ●           | ●           | ●           | ●           | ●           | ●           | ●           | ●           | ●           |
| 寬闊氣流 Wide Airflow                          |                | ●           | ●           | ●           | ●           | ●           | ●           | ●           | ●           | ●           | ●           | ●           |
| 空氣對換功能 Instant Air Exchange                |                | ●           | ●           | ●           | ●           | ●           | ●           | ●           | ●           | ●           | ●           | ●           |
| 冷媒方式 Refrigerant                           |                | R410A       | R410A       | R410A       | R410A       | R410A       | R410A       | R410A       | R410A       | R410A       | R410A       | R410A       |
| 能源效益級別 EEL                                 |                | 1           | 1           | 1           | 1           | 1           | 1           | 3           | 1           | 1           | 4           | 1           |

► 因改進而變更規格和設計恕不另行通知。詳細情形請向經銷商查詢。

Specifications and design subject to change without notice for further improvement.  
Please check with your dealer.

► 製冷能力受下面條件的影響。 Cooling capacities are based on the following conditions.

製冷 室內溫度: 27°C DB/19°C WB    Cooling Indoor temperature : 27°C DB/19°C WB  
室外溫度: 35°C DB/24°C WB    Outdoor temperature : 35°C DB/24°C WB

## 特點說明 EXPLANATION OF FEATURES

### 強大功率 Strong Power

改良的高效壓縮機或熱交換器能迅速把房間變成舒適的環境。

The efficiency-improved compressor or heat exchanger quickly changes your room into a comfortable environment.

### 寧靜運轉 Quiet Operation

即使當風扇以最高速轉動時運轉也十分寧靜。

Quiet operation is enabled even while the fan is working on high mode.

### 寬闊氣流 Wide Airflow

風葉能自動左、右搖擺。

The louver automatically swings to right and left.

### 空氣對換功能 Instant Air Exchange

可將室內污濁空氣帶走。

Stale air is immediately removed.



ISO 9001 Certified number: 01 100 89394  
Fujitsu General (Thailand) Co., Ltd.  
ISO 14001 Certified number: 01 104 9245/01



ISO 9001 Certified number: 01 100 79269



ISO 14001 Certified number: CNB311153-UK  
Fujitsu General (Shanghai) Co., Ltd.

- 在日本或其他國家或地區，“**GENERAL**”是FUJITSU GENERAL LIMITED公司的世界性商標或已註冊商標。
- 因為本產品目錄是印刷品，其顏色有可能與實際顏色有所不同。

- “**GENERAL**” is a worldwide trademark of Fujitsu General Limited and is a registered trademark in Japan and other countries or areas.
- The colors may be different from the actual colors because this catalog is printed matter.

經銷商:  
Distributed by:

## 第一電業有限公司

香港皇后大道東43至59號東美中心15樓  
顧客服務專線: 2529 7555  
維修服務專線: 2993 1733  
http://www.general-aircon.com



## FUJITSU GENERAL LIMITED

3-3-17, Suenaga, Takatsu-ku, Kawasaki 213-8502, Japan

3CGHW8-1702EC